



BUILDING LOT EROSION & DEBRIS CONTAINMENT PLAN

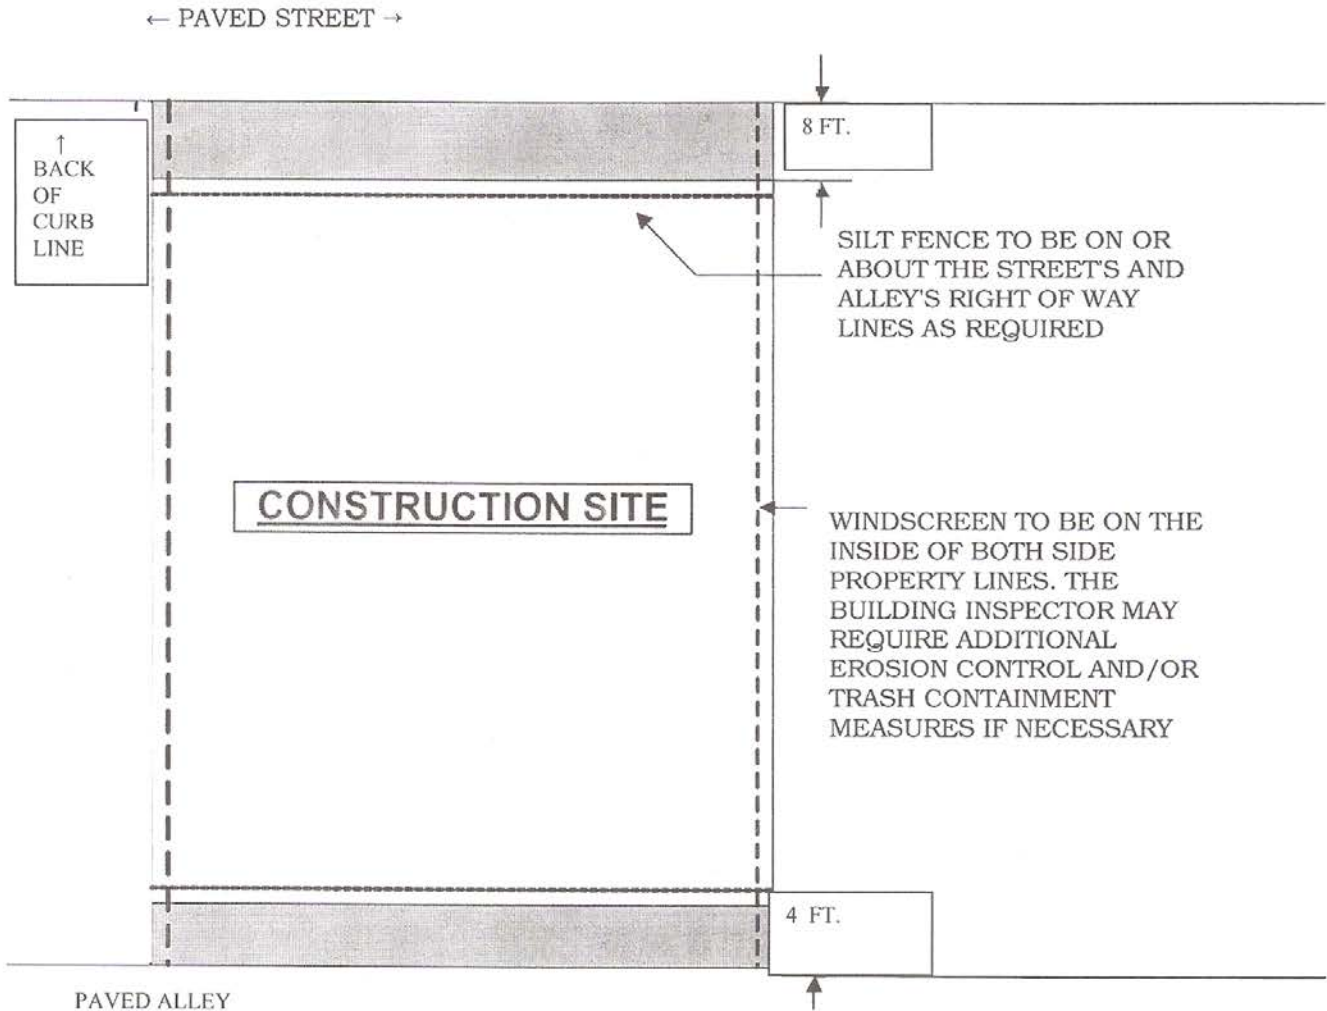

LEGEND:



CURLEX OR EQUAL GROUND COVER



4' HIGH WINDSCREEN FENCE



2' HIGH SILT FENCE (WHERE REQ'D BY SLOPE CONDITIONS)

NOTE: AREAS COVERED WITH CURLEX MUST BE CLEAR OF OBSTRUCTION AND CONSTRUCTION MATERIALS AT ALL TIMES AND CONSTANTLY MAINTAINED IN GOOD CLEAR ORDER FOR THE ENTIRE DURATION OF CONSTRUCTION ON THE LOT.

- All projects are required to have a trash bin measuring 8' square and 4' deep maintained in good condition and cleaned out regularly so as to prevent the creation of wind-blown trash and debris. Streets shall be cleaned on a regular basis and free of mud at all times. Wind-blown trash and debris shall be cleaned up on site and other sites as needed. (Per Chapter 46-20 of the Little Elm Code of Ordinances)
- All projects are required to have temporary sanitary facilities at a rate of 1 for every 10 workers.
- If a project does not have an alley at the rear, windscreen must be provided across the rear of the lot in addition to the sides.
- Exception: If a fence already exists, that portion of a lot perimeter with a fence along it does not require a windscreen.